



FEATURES



- Fast printing speed
- Multiple interface in modular type
- Saves installation space (Compact size, Wall-mount)
- Complete compatibility
- Guillotine type auto cutter
- Easy-to-use
 - Easy paper loading (Drop and print)
 - Simple to eliminate paper jam
 - Near end sensing and paper end sensing

APPLICATIONS

- POS system
- Kitchen printer
- Electronic scale
- EFT- POS
- Measuring equipment



» Easy Paper Loading (Drop and Print)

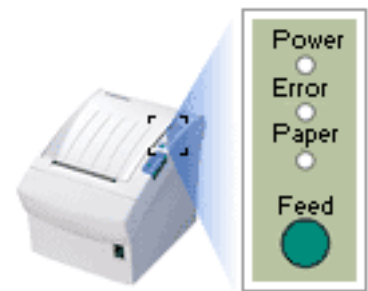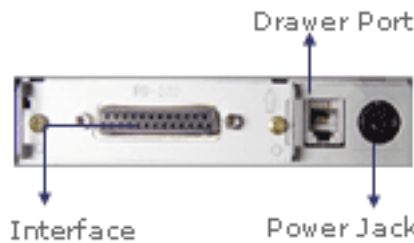

» Indicator



» Color



» Adapter

OPTION

RWM-350



» Wall Mount Bracket



RS232C(Standard)



IEEE-1284



RS485



USB



10 Base-T(Ethernet)

» Interface

▣ SPECIFICATIONS

ITEM		TYPE
Print	Printing Method	Direct line thermal
	Printing Speed(lps)	46.2(150mm/sec)
	Resolution(dpi)	180 (7 dot/mm)
Font	Size	12 x 24 (at 42 Columns)
		9 X 17 (at 56 Columns)
	Character set	Alphanumeric : 95
		International : 32
		Extended graphic: 128 x 7 page(Including 1 space page)
Paper	Type	Thermal roll paper
	Width(mm)	79.5± 0.5
	Roll diameter(mm)	Max. Ø 80.0
Emulation		Epson & Star
Flash memory		8Mbit
Interface	Standard	RS-232C
	Option	RS-485,USB,IEEE-1284,10Base-T(Ethernet)
Driver		DOS, Windows 95/98/ME/NT/2000/XP, OPOS
Drawer port		2 ports
Barcodes		EAN-13, EAN-8, Code39, Code93, Code128, ITF, Codabar, UPC-A, UPC-E
Reliability	MCBF	37 x 10 ⁶ Up to lines
	TPH line	10 x 10 ⁶ Up to pulse(100Km)
	Auto cut	10 x 10 ⁵ Up to cuts
Option	Wall mount	RWM-350
	Language	Asian language support
		Chinese, Thai, Japanese, Arabic, Turkey, Iran, Russian
Power supply		24VDC±10%, 2A
Dimensions (mm)		145 (W) x 195 (D) x 146(H)