



FEATURES

- Fast printing speed
- Multiple interface in modular type
- Complete compatibility
- Compact design
- Guillotine type auto cutter
- Easy-to-use
 - Plug and play printing
 - Easy paper loading for paper replacement
 - Paper end sensing

APPLICATIONS


- POS system
- Kitchen printer
- Electronic scale
- EFT- POS
- Measuring equipment



Easy paper loading for paper replacement



Paper jam and Skew free technology

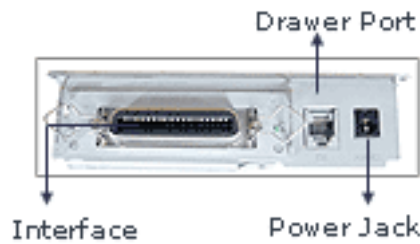

» Indicator

Chic White



Dark Gray



» Color



» Adapter



Ribbon Cassette (ERC-30/38 Compatible)

» Ribbon Cassette

OPTION



RS232C(Standard)



IEEE-1284



RS485



USB



10 Base-T(Ethernet)

» Interface

▣ SPECIFICATIONS

ITEM		TYPE
Print	Printing method	9 pin serial impact dot matrix
	Printing speed(lps)	4.6 (at 40 columns)
Font	Size	7 x 9 (at 40 columns)
		9 X 9 (at 33 columns)
	Character set	Alphanumeric : 95
		International : 32
		Extended graphic: 128 x 7 page(Including 1 space page)
Paper	Type	Roll paper
	Width(mm)	76± 0.5
	Roll diameter(mm)	Max. Ø 83.0
Ribbon cassette		ERC-30/38 Compatible
Emulation		Samsung & ESC/POS
Interface	Standard	RS-232C
	Option	RS-485,USB,IEEE-1284,10Base-T(Ethernet)
Driver		Windows 95/98/ME/2000/XP, OPOS
Drawer Port		2 Ports(Max. 2 drawers)
Reliability	MCBF	18 X 10 ⁶ Up to lines
	Auto Cut	15 X 10 ⁵ Up to cuts
Option	Language	Asian language support
		Chinese, Thai, Arabic, Turkey
Power Supply		24VDC±10% 1.0A
Dimensions(mm)		160 (W) x 294 (D) x 160 (H)